


SECTION A-A

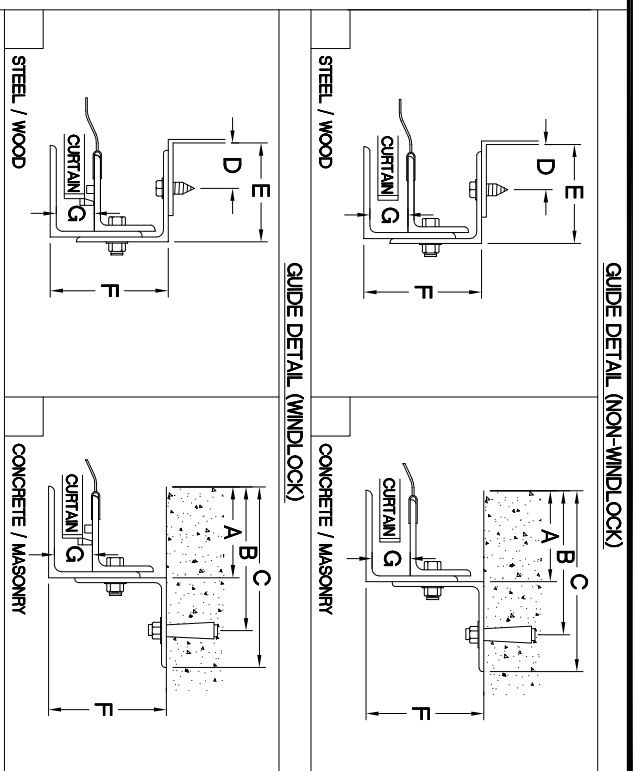

GUIDE DIMENSIONS

GUIDE TYPE	A	B	C	D	E	F	G
2	2 5/8"	3 7/8"	5 1/8"	1 1/4"	2 13/16"	4"	1 1/4"
3	2 5/8"	4 3/4"	5 5/8"	1 1/4"	2 13/16"	4 3/8"	1 1/4"
4	2 5/8"	4 3/4"	5 5/8"	1 1/4"	2 7/8"	4 3/4"	1 1/4"
2(W/L)	3"	4 1/4"	5 1/2"	1 5/8"	3 3/16"	4"	1 1/2"
3(W/L)	3"	5 1/8"	6"	1 5/8"	3 3/16"	4 3/8"	1 1/2"
4(W/L)	3"	5 1/8"	6"	1 5/8"	3 1/4"	4 3/4"	1 1/2"
5(W/L)	3"	5 1/8"	6"	1 5/8"	3 1/4"	4 3/4"	1 1/2"
6(W/L)	5 1/4"	6 1/2"	7 3/4"	1 5/8"	4 7/8"	7 1/4"	1 1/2"

GENERAL NOTES

SLATS/HOOD: SELECT FINISH OPTION BELOW (HOOD INCLUDES WEATHER BARRIER)

GRAY POLYESTER TOP COAT

WHITE POLYESTER TOP COAT

OTHER SURFACES:

SHOP COAT BLACK PRIMER

OPERATION:

RIGHT HAND SHOWN, LEFT HAND OPPOSITE

GUIDES:

STRUCTURAL STEEL ANGLES OF 3/16" MINIMUM THICKNESS

WITH PVC WEATHER SEAL

BOTTOM BAR:

TWO 2"x2"x1/8" STEEL ANGLES WITH PVC BULB ASTRAGAL

MARK	QTY.	OPENING SIZE	OPERATION	RH	CLEARANCES	OPTION	PROJECT:	
		WIDTH "W"		LH	"X+2"	"V"	ARCHITECT:	
		HEIGHT "H"					CONTRACTOR:	
							DISTRIBUTOR:	
							DATE:	
							SHEET: OF:	
							BY:	
							REF #	
								4255 McEvier Industrial Dr. Acworth, GA 30011 PH(770) 924-2800 Fax(770) 974-1455 www.astadoor.com

600 SERIES-INSULATED-FACE OF WALL-VISION LITES (QH MOTOR)

ASTA Door Corporation is not responsible for the use of improper installation procedures, structural supports as well as field inspection prior to manufacturing and installation.

APPROVAL SIGNATURE: _____ DATE: _____