



# 200

## Commercial Sheet Door

ASTA Door 200 Series continuous corrugated Commercial Sheet Door is produced with the highest quality and durability in the industry. The Model 201 is available in sizes up to 12' x 16' and Model 201HD is available in sizes up to 20' x 18' in a variety of colors. Excellent price and efficient installation makes our Commercial Sheet Doors the perfect choice for loading docks, warehouse buildings, distribution centers, freight terminals, or any commercial applications.



### OPTIONS

**CHAIN HOIST** | Reduction gear for easy, smooth operation (where not standard).

**STEEL MOUNTING PLATES** | For lateral jamb extension to provide door support.

**ELECTRIC OPERATION** | Easy, fast motorized operation at a push of a button.

**TOP DRAFT STOP** | To seal tight at the header to reduce air filtration (standard on model 202/202HD).

**SIDE DRAFT SEAL** | 2" brush weatherseal with 1" aluminum retainer attached to door jamb (field installed) (standard on model 202/202HD).

**VISION PANELS** | 7" x 22" Lexan windows for viewing outside without opening door.

**INSULATION** | Refer to ASTA Model 202/202HD - standard 201/201HD design with mylar and polyethylene insulation laminated to backside of curtain.


**WINDLOCK** | Refer to ASTA Model 203. (separate brochure)

**Hardware** | For mounting to steel, wood or block/masonry jambs (specify when ordering).

**Curtain** | The 26-gauge corrugated door curtain is manufactured from full hard galvanized grade 80 steel and coated with Super Durable polyester paint that is backed by a 40 year film integrity and 25 year no-fade limited paint warranty.

**Bottom Bar** | 2" x 1½" x 12-gauge galvanized steel angle fastened to aluminum retainer with PVC bulb astragal.

**Locks** | Dual galvanized steel slide bolt locks attached to the bottom bar suitable for padlocks (padlocks by others).

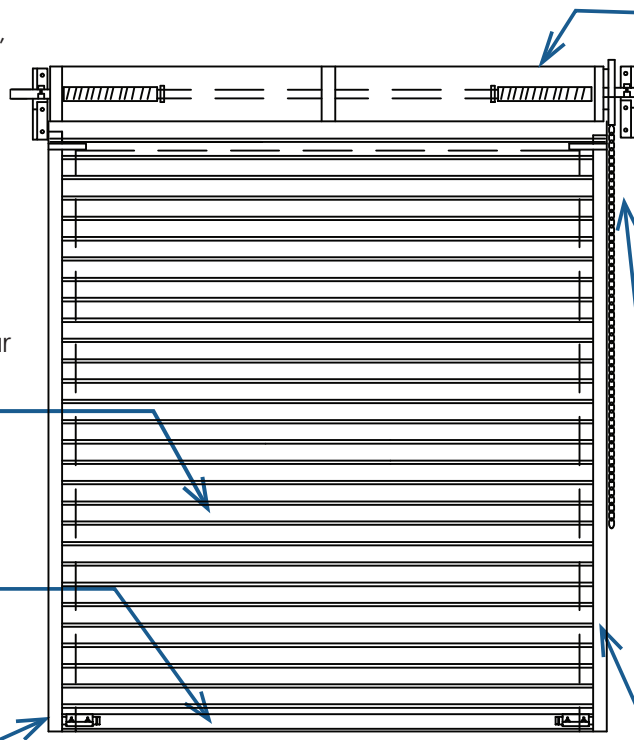

**Drum/Axle Assembly** | 12" diameter galvanized steel spiral torque tube attached to 16-gauge galvanized drums, supported by 1 5/16" O.D. steel tubing. All drums are fitted with a grease filled, shielded radial ball bearing for a smoother operation and reduced friction and wear.


**Operation** | Rope pull up to 10'-0" wide x 10'-0" high, otherwise, reduction gear chain hoist standard.

**Guides** | 14-gauge galvanized channels (2½" deep per side) standard on all sizes for Model 201 (202): 12-gauge galvanized channels (3½" deep per side) standard on all sizes for 201HD (202HD).

### Commercial Door 201/201HD

The Model 201/201HD offers an economical door in sizes up to 20 feet wide by 18 feet high. Easy operation and superior performance make this an outstanding door. Every Model 201/201HD is fitted with Nylon & Elastic side stripping to prevent metal to metal contact within the door guide and ensure a quiet and easy operating door.


## Specification Details

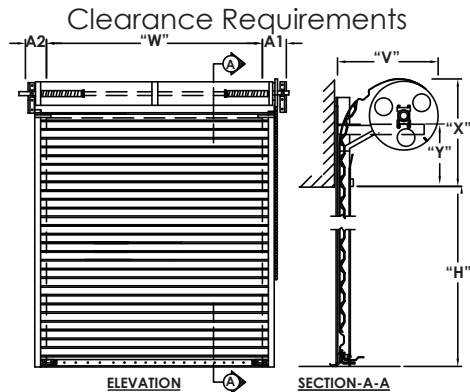


Clearance Requirements For Model 201 Sheet Door

	Height	*A-1	*A-2	X	Y	V
Manual Push Up	Up to 8'	6"	6"	20"	9 ½"	20"
Manual Push Up	Up to 10'	6"	6"	21"	10"	21"
Chain Hoist or Electric Operator	Up to 8'	6"	9"	20"	10"	20"
	Up to 10'	6"	9"	21"	11"	21"
	Up to 16'	6"	9"	23"	11"	24"
	Up to 20'	7"	10"	24"	12"	24"
*Side Room For 201HD and 202HD Add 1" to A-1 and A-2						
Dimensions do not include the operator itself						


201 Standard Guide Mount to Steel




201 Standard Guide Mount to Masonry



201HD Standard Guide Mount to Steel



201HD Standard Guide Mount to Masonry

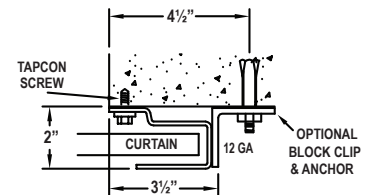

ASTA Door Corporation reserves the right to change engineering specs. without prior notice. Illustrations shown are for general reference and should be verified for construction purposes. Consult customer service for technical support.